


Adjustable paver pedestal

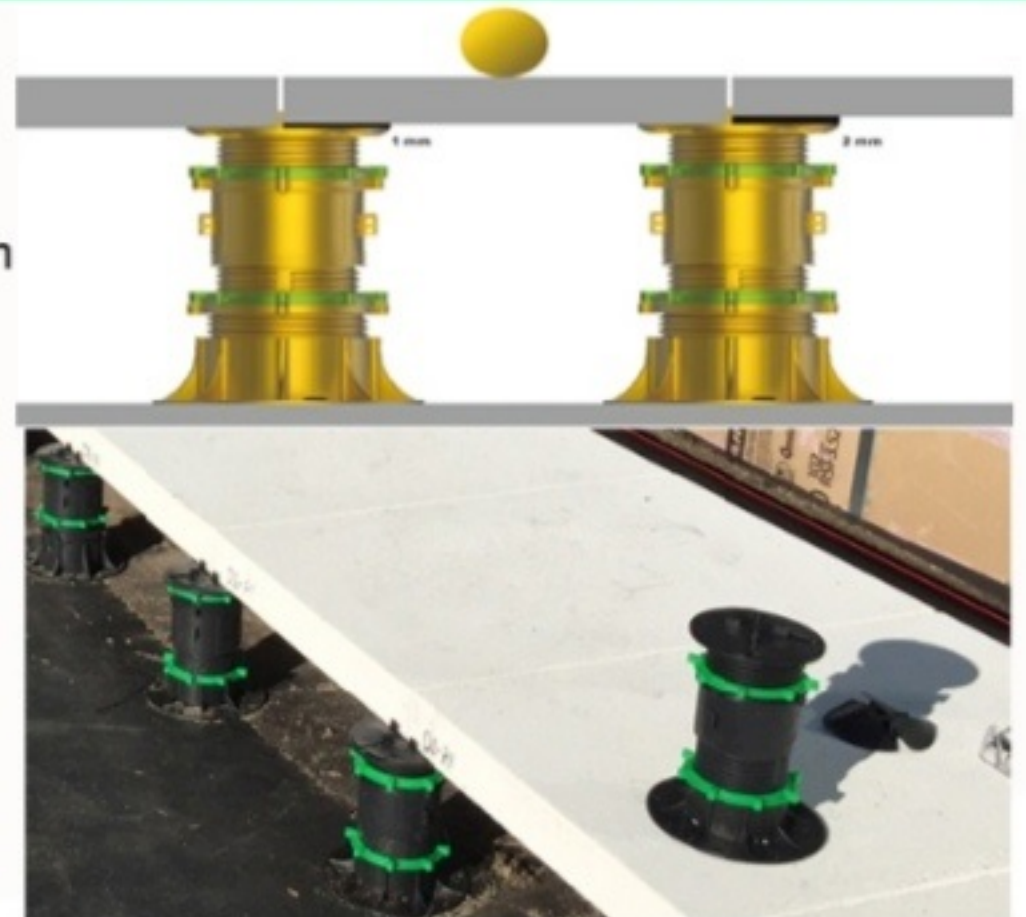

Adjustable Height

Adjustable height from 180mm to 320mm uninterrupted

Composition

1 head + 1 base + 1 adjustment ring + 1 extender + 2 fix collar
+ 1 spacer tab + 1 shim

Material

Polypropylene(PP), material thickness 4.5mm-6mm;
Composition 90% PP, 10% talc, UV and black masterbatch
100% recyclable

Dimensions

Head=diameter 150mm - surface area 176 cm²

Base=diameter 200mm - ground surface 315 cm²

Extender=extender diameter 120mm - adjustable height

Performance

Resisting UV rays, weather, sea salt and almost all chemicals.
Temperature range: -40 degree celsius to +120 degree celsius.

Application

Support for outdoor terraces with any kind of material: timber decking, stone, ceramic, composite material, metal, fiberglass grid... Can be placed on any stable substrate, also over insulation panels.

Slope corrector from 0%-5%

Slope correctors could compensate ground fall 0%-5%, making ideal levelling surface. It is assembled on the bottom of pedestals. Clients could choose to use it or not with different installing condition.

Application Details

1. Spacer tabs thickness: 2mm, 3.5mm, 5mm, 8mm, 10mm
2. Slope corrector : compensate slope 0%-5%
3. Shim: anti-slip, reduce impact, absorb shock and sound, compensate floor thickness difference



Fix Collar:

Fix and lock height after adjustment, increase stability



Standard green color, Made in PP

Shim:

anti-slip, reduce impact, absorb shock, compensate floor thickness difference



1mm / 2mm thickness

Compression Test


Performed on the full (1/1), half (1/2) or quarter (1/4) surface of the head

Position	Height(mm)	Breaking Loads(kgs)
1/1	260	1365
1/2	260	1159
1/4	260	965

Safety Value for maximum allowable load by compression for MB-T1:

1. Safety for pedestrian terrace: divide the load indicated in the table by 2 with a safety factor of -15%.
2. Safety for technical floors: divide the load indicated in the table by 4 with a safety factor of -15%.

Adjustable paver pedestal

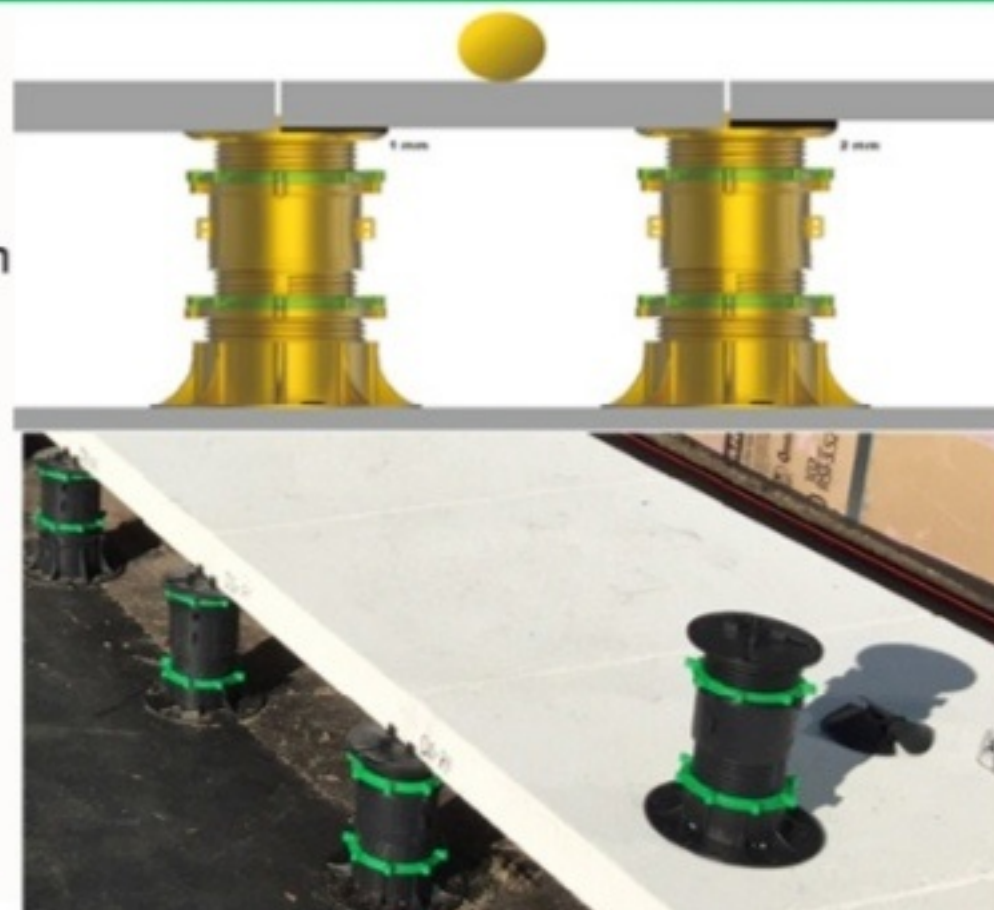

Adjustable Height

Adjustable height from 250mm to 370mm uninterrupted

Composition

1 head + 1 base + 1 adjustment ring + 1 HIGH extender + 2 fix collar + 1 spacer tab + 1 shim

Material

Polypropylene(PP), material thickness 4.5mm-6mm;
Composition 90% PP, 10% talc, UV and black masterbatch
100% recyclable

Dimensions

Head=diameter 150mm - surface area 176 cm²
Base=diameter 200mm - ground surface 315 cm²
Extender=extender height 220mm - adjustable height

Performance

Resisting UV rays, weather, sea salt and almost all chemicals.
Temperature range: -40 degree celsius to +120 degree celsius.

Application

Support for outdoor terraces with any kind of material: timber decking, stone, ceramic, composite material, metal, fiberglass grid... Can be placed on any stable substrate, also over insulation panels.

Slope corrector from 0%-5%

Slope correctors could compensate ground fall 0%-5%, making ideal levelling surface. It is assembled on the bottom of pedestals. Clients could choose to use it or not with different installing condition.

Application Details

1. Spacer tabs thickness: 2mm, 3.5mm, 5mm, 8mm, 10mm
2. Slope corrector : compensate slope 0%-5%
3. Shim: anti-slip, reduce impact, absorb shock and sound, compensate floor thickness difference



Fix Collar:

Fix and lock height after adjustment, increase stability



Standard green color, Made in PP

Shim:

anti-slip, reduce impact, absorb shock, compensate floor thickness difference



1mm / 2mm thickness

Compression Test



Performed on the full (1/1), half (1/2) or quarter (1/4) surface of the head

Position	Height(mm)	Breaking Loads(kgs)
1/1	310	1265
1/2	310	1120
1/4	310	925

Safety Value for maximum allowable load by compression for HIGH MB-T1:

1. Safety for pedestrian terrace: divide the load indicated in the table by 2 with a safety factor of -15%.
2. Safety for technical floors: divide the load indicated in the table by 4 with a safety factor of -15%.

Adjustable paver pedestal

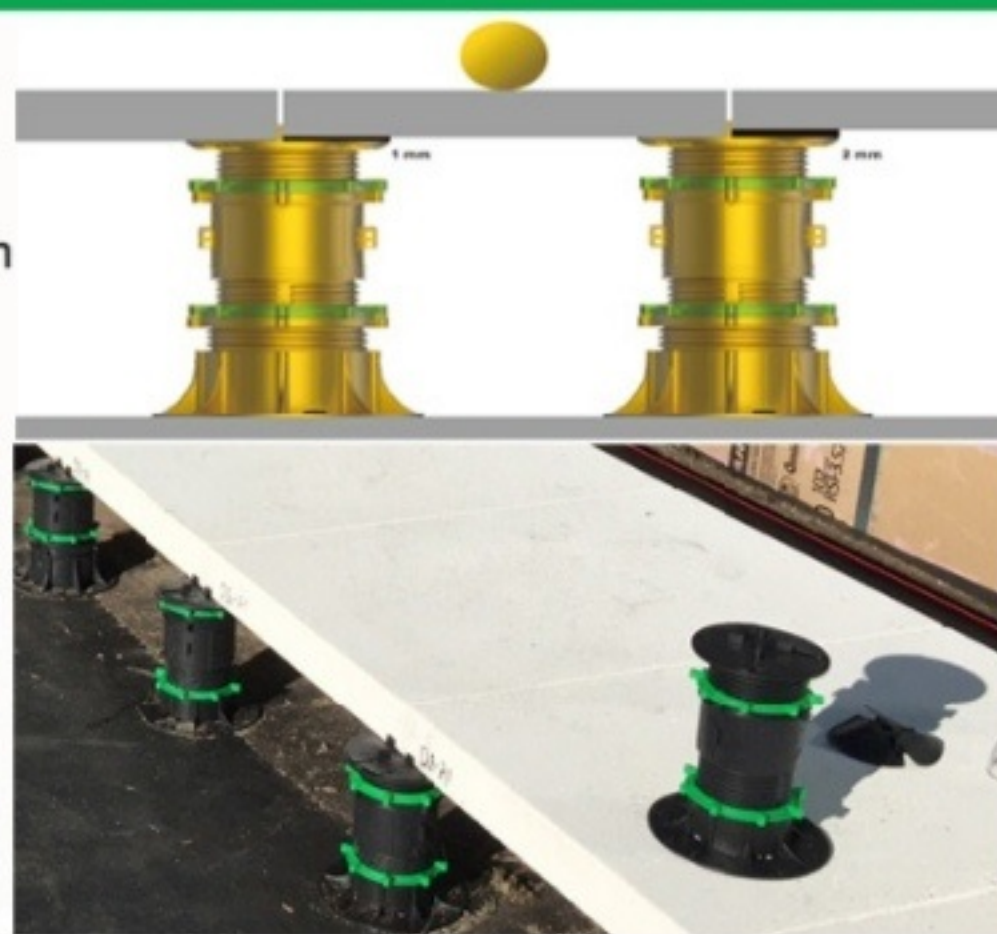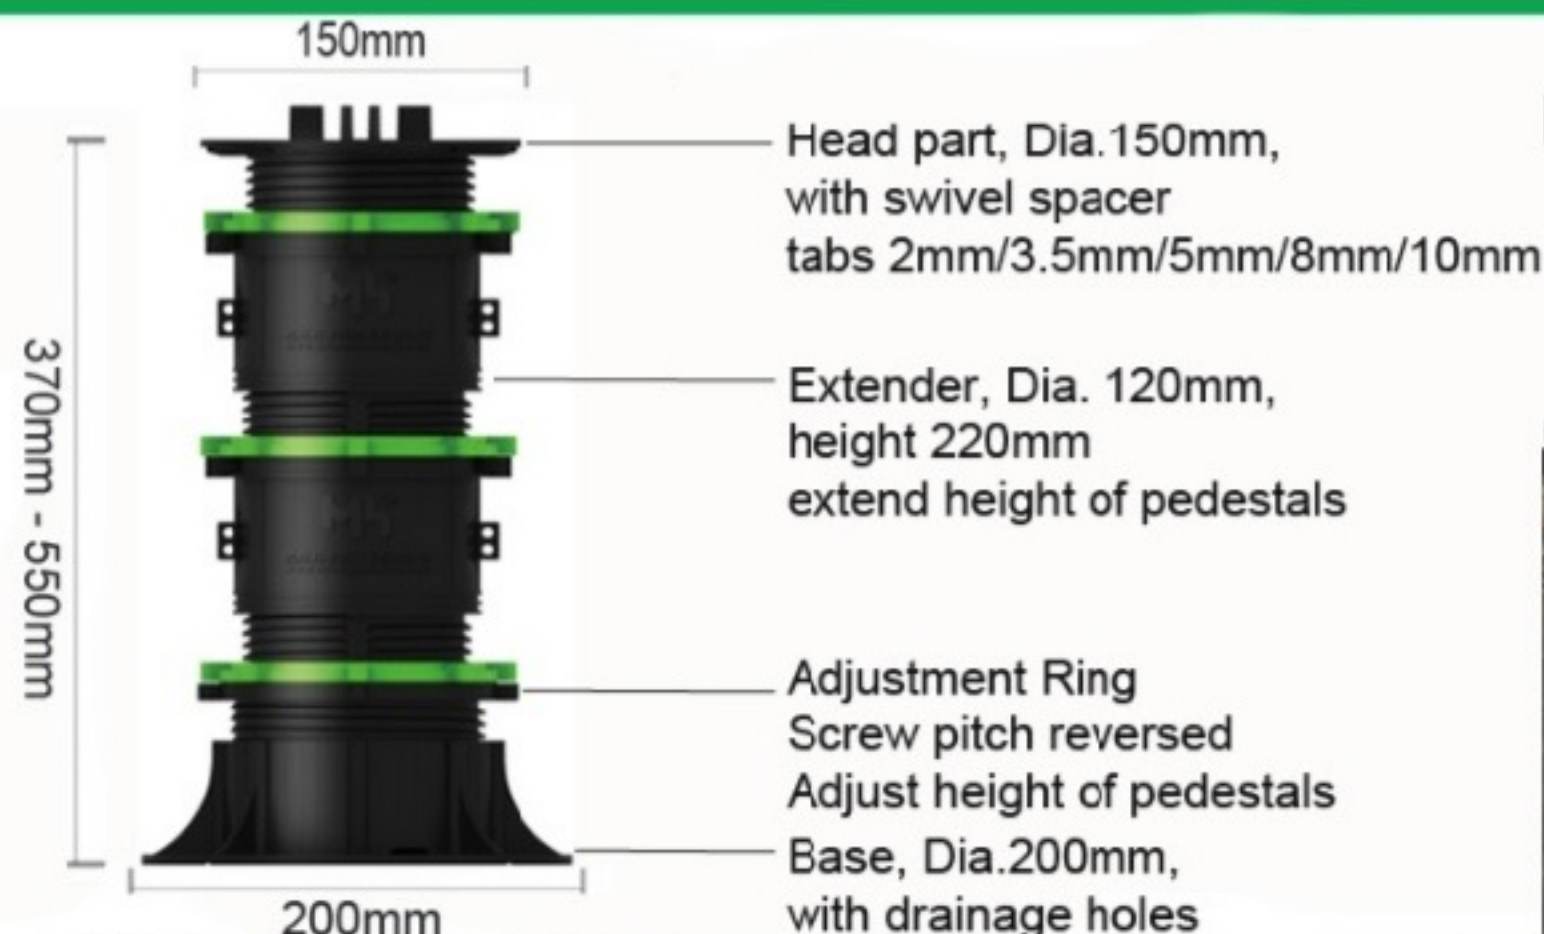

Adjustable Height

Adjustable height from 370mm to 550mm uninterrupted

Composition

1 head + 1 base + 1 adjustment ring + 2 HIGH extender + 3 fix collar + 1 spacer tab + 1 shim

Material

Polypropylene(PP), material thickness 4.5mm-6mm;
Composition 90% PP, 10% talc, UV and black masterbatch
100% recyclable

Dimensions

Head=diameter 150mm - surface area 176 cm²
Base=diameter 200mm - ground surface 315 cm²
Extender=extender height 220mm - adjustable height

Performance

Resisting UV rays, weather, sea salt and almost all chemicals.
Temperature range: -40 degree celsius to +120 degree celsius.

Application

Support for outdoor terraces with any kind of material: timber decking, stone, ceramic, composite material, metal, fiberglass grid... Can be placed on any stable substrate, also over insulation panels.

Slope corrector from 0%-5%

Slope correctors could compensate ground fall 0%-5%, making ideal levelling surface. It is assembled on the bottom of pedestals. Clients could choose to use it or not with different installing condition.

Application Details

1. Spacer tabs thickness: 2mm, 3.5mm, 5mm, 8mm, 10mm
2. Slope corrector : compensate slope 0%-5%
3. Shim: anti-slip, reduce impact, absorb shock and sound, compensate floor thickness difference



Fix Collar:

Fix and lock height after adjustment, increase stability



Standard green color, Made in PP

Shim:

anti-slip, reduce impact, absorb shock, compensate floor thickness difference



1mm / 2mm thickness

Compression Test



Performed on the full (1/1), half (1/2) or quarter (1/4) surface of the head

Position	Height(mm)	Breaking Loads(kgs)
1/1	460	1290
1/2	460	1129
1/4	460	920

Safety Value for maximum allowable load by compression for HIGH MB-T2:

1. Safety for pedestrian terrace: divide the load indicated in the table by 2 with a safety factor of -15%.
2. Safety for technical floors: divide the load indicated in the table by 4 with a safety factor of -15%.

Adjustable paver pedestal

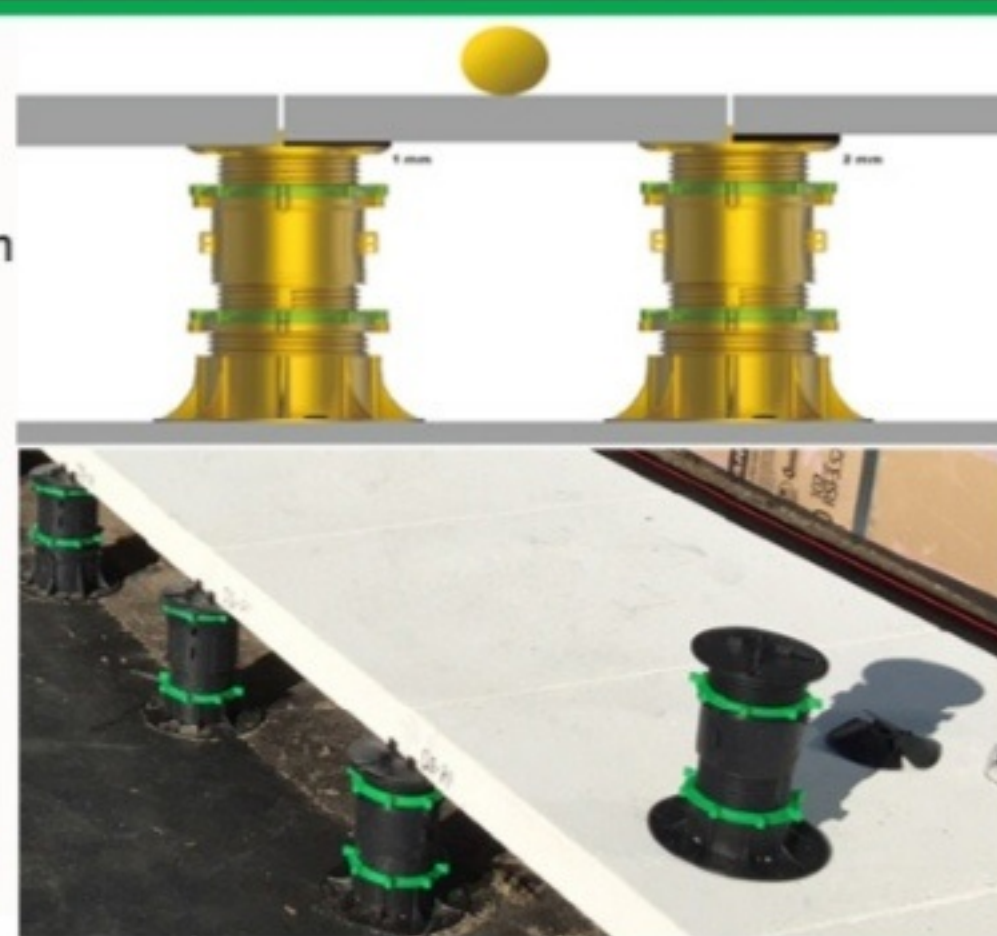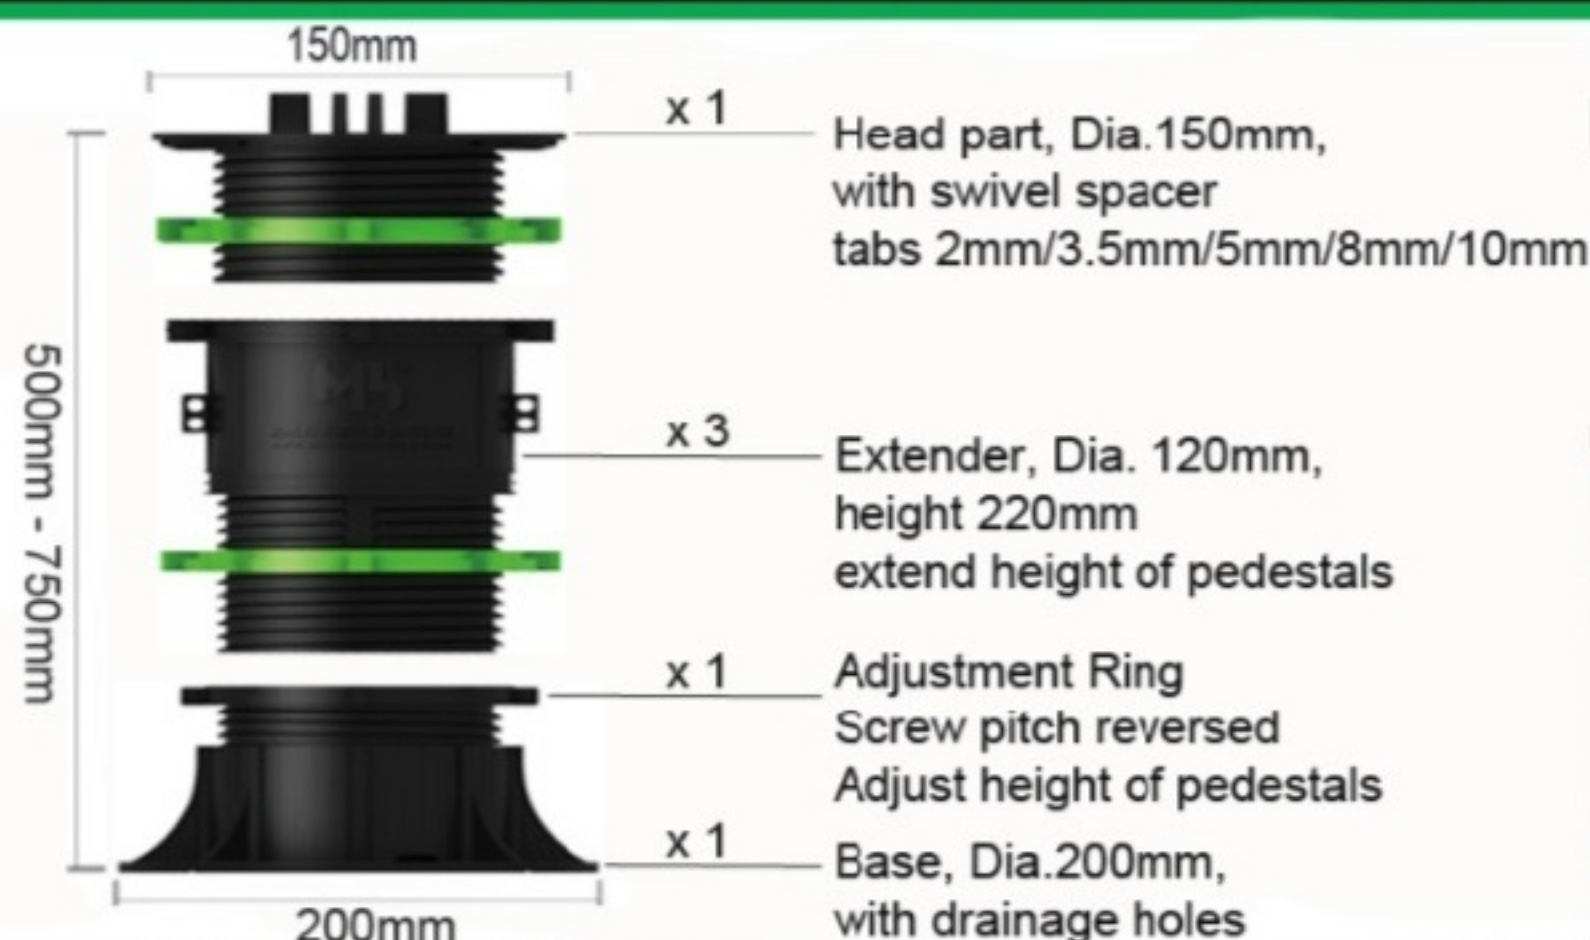

Adjustable Height

Adjustable height from 500mm to 750mm uninterrupted

Composition

1 head + 1 base + 1 adjustment ring + 3 HIGH extender + 4 fix collar + 1 spacer tab + 1 shim

Material

Polypropylene(PP), material thickness 4.5mm-6mm;
Composition 90% PP, 10% talc, UV and black masterbatch
100% recyclable

Dimensions

Head=diameter 150mm - surface area 176 cm²
Base=diameter 200mm - ground surface 315 cm²
Extender=extender height 220mm - adjustable height

Performance

Resisting UV rays, weather, sea salt and almost all chemicals.
Temperature range: -40 degree celsius to +120 degree celsius.

Application

Support for outdoor terraces with any kind of material: timber decking, stone, ceramic, composite material, metal, fiberglass grid... Can be placed on any stable substrate, also over insulation panels.

Slope corrector from 0%-5%

Slope correctors could compensate ground fall 0%-5%, making ideal levelling surface. It is assembled on the bottom of pedestals. Clients could choose to use it or not with different installing condition.

Application Details

1. Spacer tabs thickness: 2mm, 3.5mm, 5mm, 8mm, 10mm
2. Slope corrector : compensate slope 0%-5%
3. Shim: anti-slip, reduce impact, absorb shock and sound, compensate floor thickness difference



Fix Collar:

Fix and lock height after adjustment, increase stability



Standard green color, Made in PP

Shim:

anti-slip, reduce impact, absorb shock, compensate floor thickness difference



1mm / 2mm thickness

Compression Test



Performed on the full (1/1), half (1/2) or quarter (1/4) surface of the head

Position	Height(mm)	Breaking Loads(kgs)
1/1	625	1285
1/2	625	1090
1/4	625	915

Safety Value for maximum allowable load by compression for HIGH MB-T3:

1. Safety for pedestrian terrace: divide the load indicated in the table by 2 with a safety factor of -15%.
2. Safety for technical floors: divide the load indicated in the table by 4 with a safety factor of -15%.

Adjustable paver pedestal

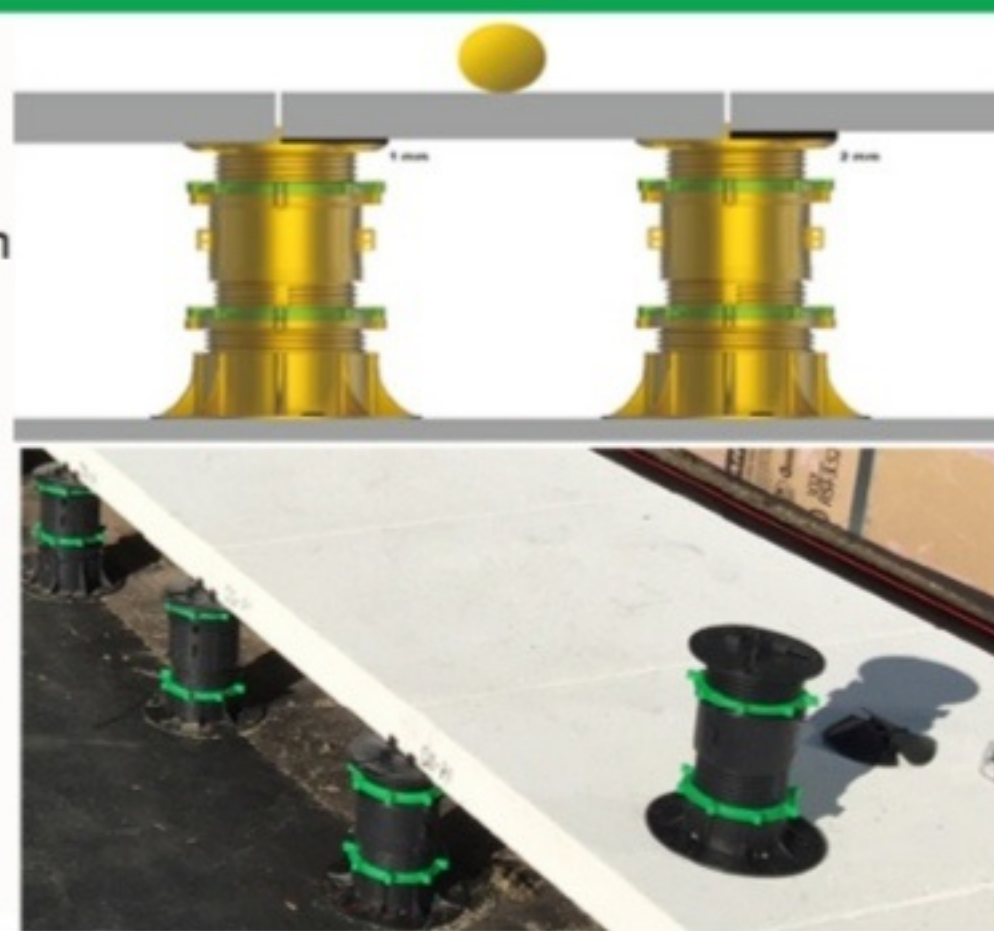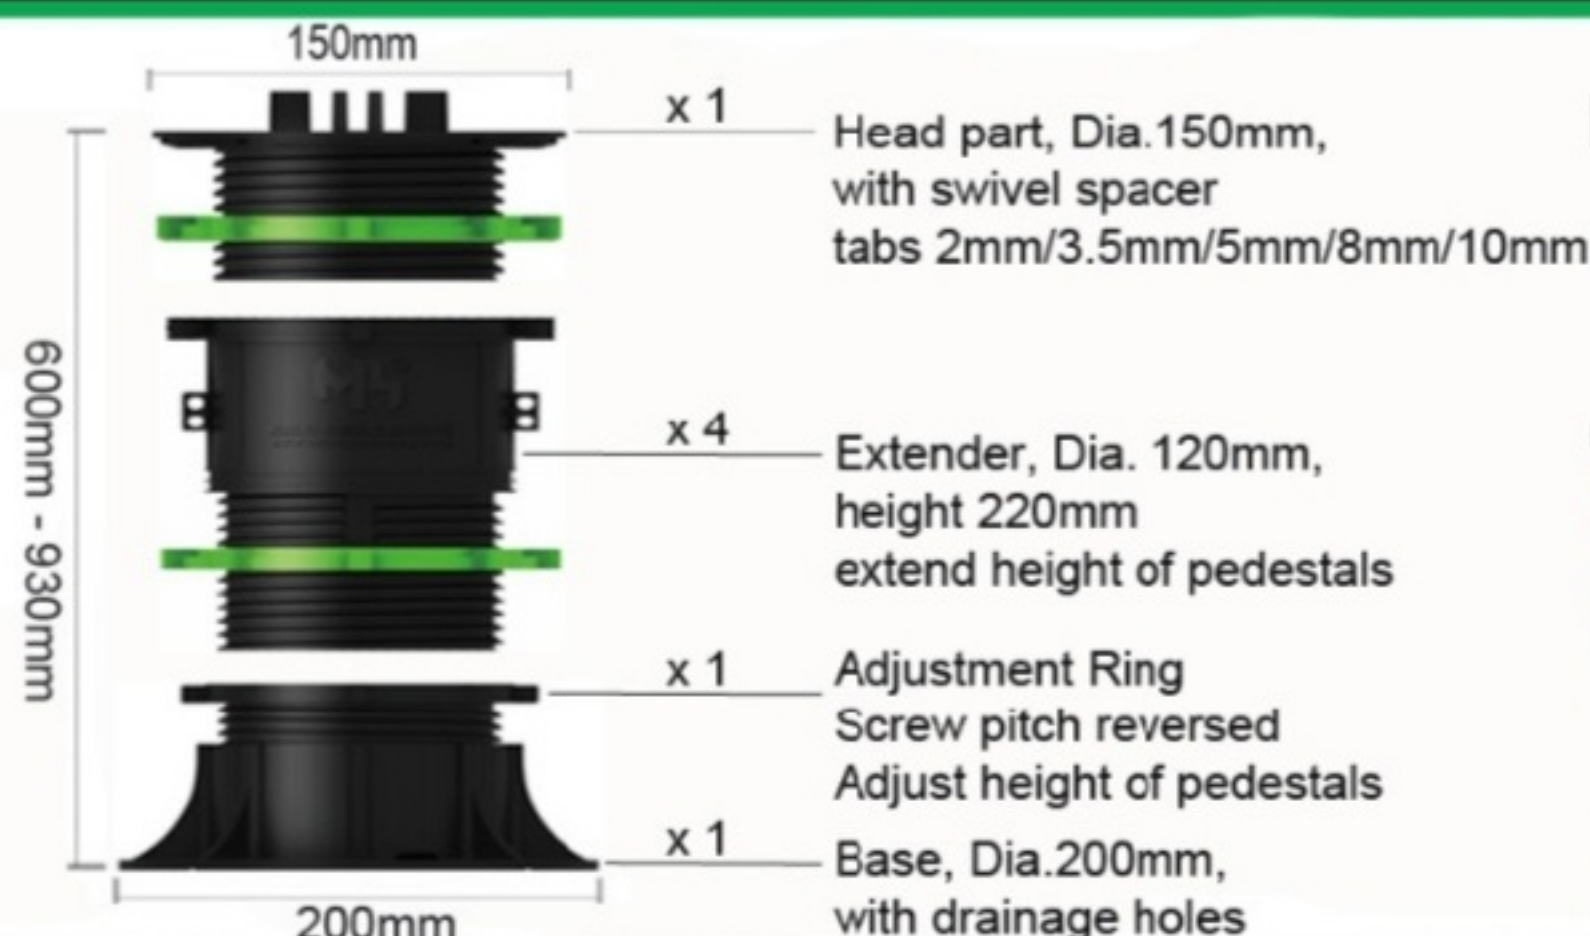

Adjustable Height

Adjustable height from 600mm to 930mm uninterrupted

Composition

1 head + 1 base + 1 adjustment ring + 4 HIGH extender + 5 fix collar + 1 spacer tab + 1 shim

Material

Polypropylene(PP), material thickness 4.5mm-6mm;
Composition 90% PP, 10% talc, UV and black masterbatch
100% recyclable

Dimensions

Head=diameter 150mm - surface area 176 cm²
Base=diameter 200mm - ground surface 315 cm²
Extender=extender height 220mm - adjustable height

Performance

Resisting UV rays, weather, sea salt and almost all chemicals.
Temperature range: -40 degree celsius to +120 degree celsius.

Application

Support for outdoor terraces with any kind of material: timber decking, stone, ceramic, composite material, metal, fiberglass grid... Can be placed on any stable substrate, also over insulation panels.

Slope corrector from 0%-5%

Slope correctors could compensate ground fall 0%-5%, making ideal levelling surface. It is assembled on the bottom of pedestals. Clients could choose to use it or not with different installing condition.

Application Details

1. Spacer tabs thickness: 2mm, 3.5mm, 5mm, 8mm, 10mm
2. Slope corrector : compensate slope 0%-5%
3. Shim: anti-slip, reduce impact, absorb shock and sound, compensate floor thickness difference



Fix Collar:

Fix and lock height after adjustment, increase stability



Standard green color, Made in PP

Shim:

anti-slip, reduce impact, absorb shock, compensate floor thickness difference



1mm / 2mm thickness

Compression Test



Performed on the full (1/1), half (1/2) or quarter (1/4) surface of the head

Position	Height(mm)	Breaking Loads(kgs)
1/1	765	1129
1/2	765	1125
1/4	765	890

Safety Value for maximum allowable load by compression for HIGH MB-T4:

1. Safety for pedestrian terrace: divide the load indicated in the table by 2 with a safety factor of -15%.
2. Safety for technical floors: divide the load indicated in the table by 4 with a safety factor of -15%.

Adjustable paver pedestal

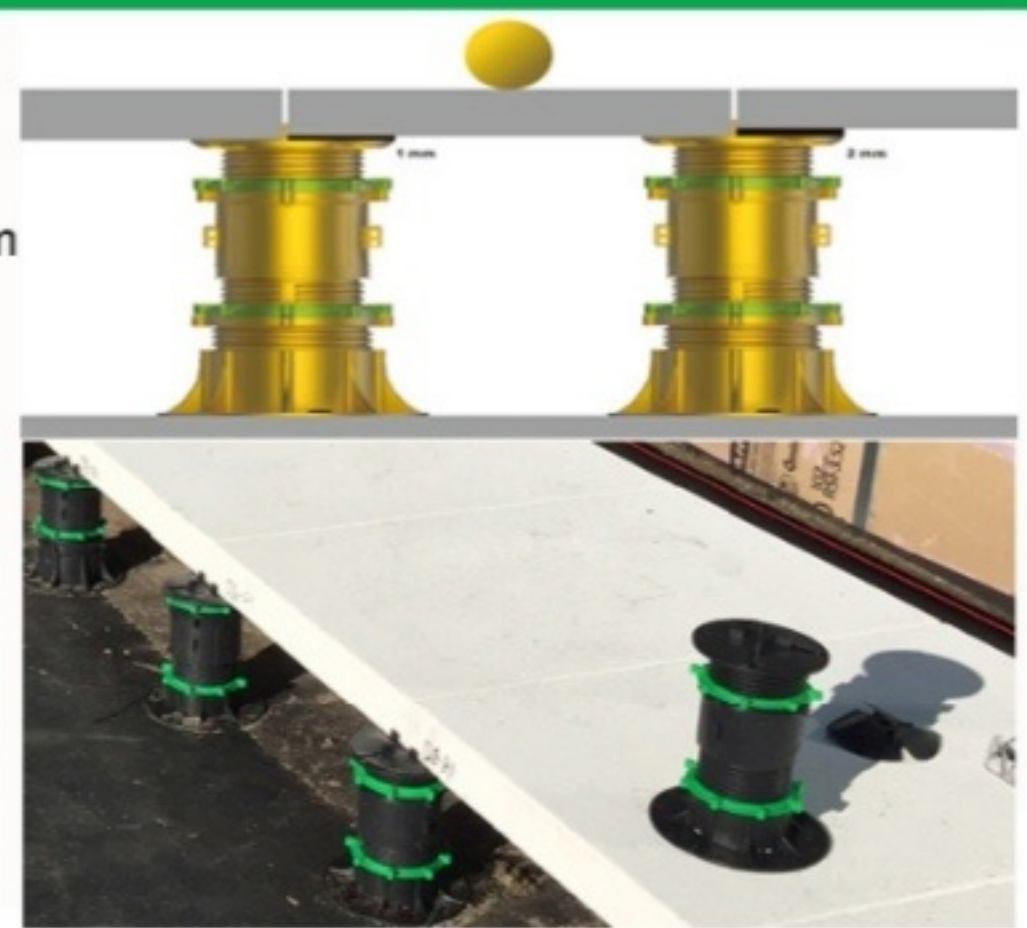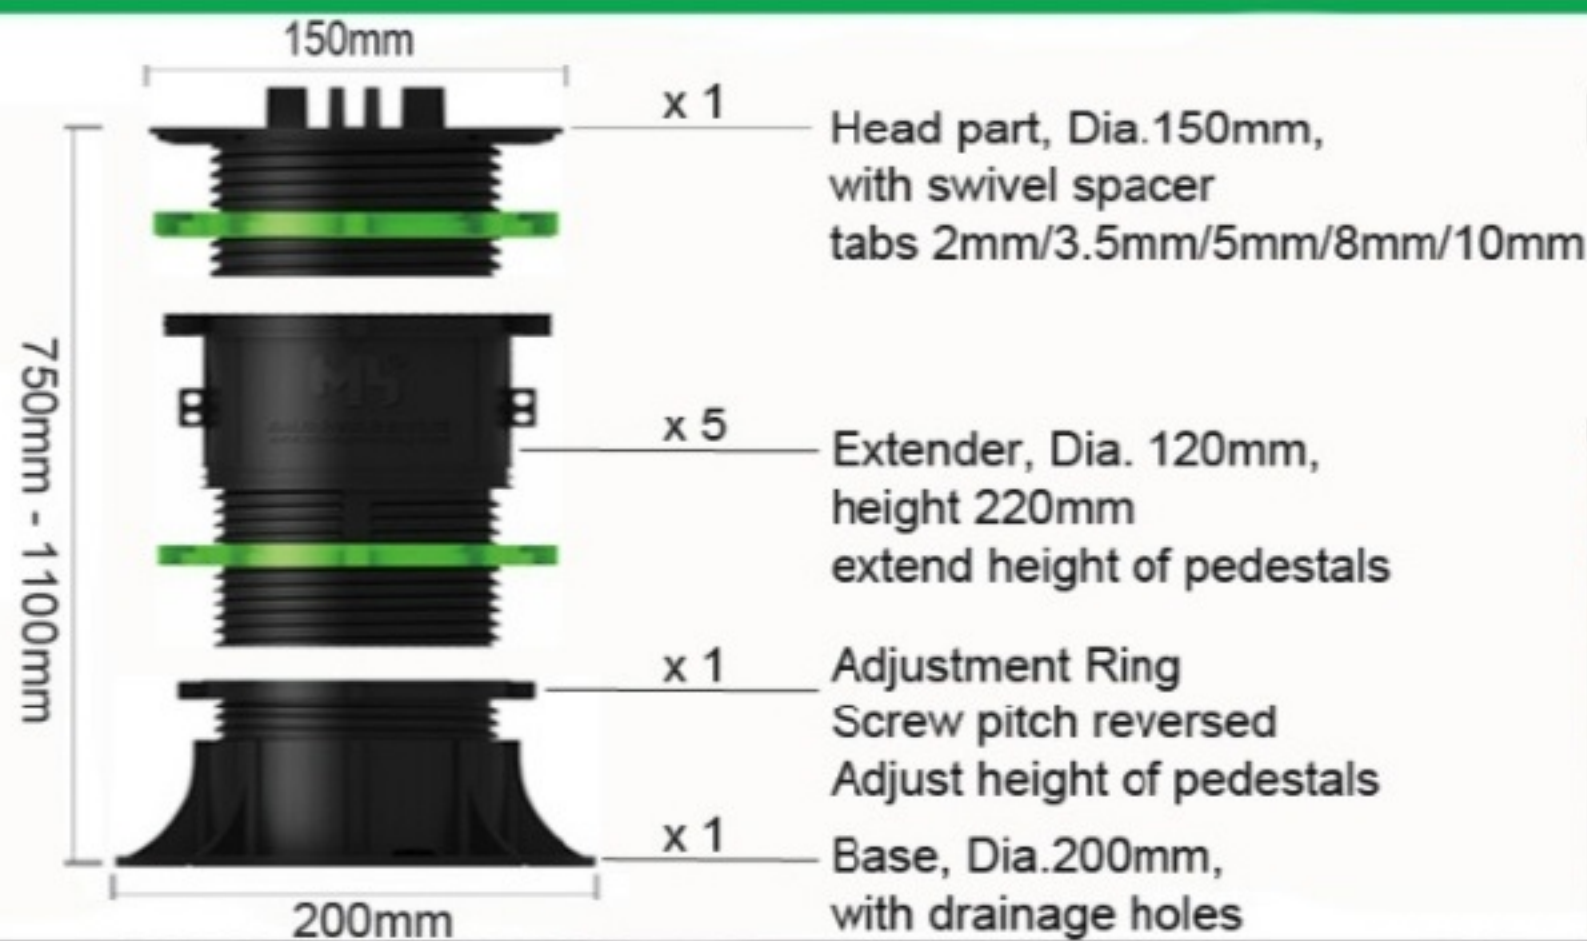

Adjustable Height

Adjustable height from 750mm to 1100mm uninterrupted

Composition

1 head + 1 base + 1 adjustment ring + 5 HIGH extender + 6 fix collar + 1 spacer tab + 1 shim

Material

Polypropylene(PP), material thickness 4.5mm-6mm;
Composition 90% PP, 10% talc, UV and black masterbatch
100% recyclable

Dimensions

Head=diameter 150mm - surface area 176 cm²
Base=diameter 200mm - ground surface 315 cm²
Extender=extender height 220mm - adjustable height

Performance

Resisting UV rays, weather, sea salt and almost all chemicals.
Temperature range: -40 degree celsius to +120 degree celsius.

Application

Support for outdoor terraces with any kind of material: timber decking, stone, ceramic, composite material, metal, fiberglass grid... Can be placed on any stable substrate, also over insulation panels.

Slope corrector from 0%-5%

Slope correctors could compensate ground fall 0%-5%, making ideal levelling surface. It is assembled on the bottom of pedestals. Clients could choose to use it or not with different installing condition.

Application Details

1. Spacer tabs thickness: 2mm, 3.5mm, 5mm, 8mm, 10mm
2. Slope corrector : compensate slope 0%-5%
3. Shim: anti-slip, reduce impact, absorb shock and sound, compensate floor thickness difference



Fix Collar:

Fix and lock height after adjustment, increase stability



Standard green color, Made in PP

Shim:

anti-slip, reduce impact, absorb shock, compensate floor thickness difference



1mm / 2mm thickness

Compression Test



Performed on the full (1/1), half (1/2) or quarter (1/4) surface of the head

Position	Height(mm)	Breaking Loads(kgs)
1/1	925	1025
1/2	925	1100
1/4	925	860

Safety Value for maximum allowable load by compression for HIGH MB-T5:

1. Safety for pedestrian terrace: divide the load indicated in the table by 2 with a safety factor of -15%.
2. Safety for technical floors: divide the load indicated in the table by 4 with a safety factor of -15%.

Adjustable paver pedestal

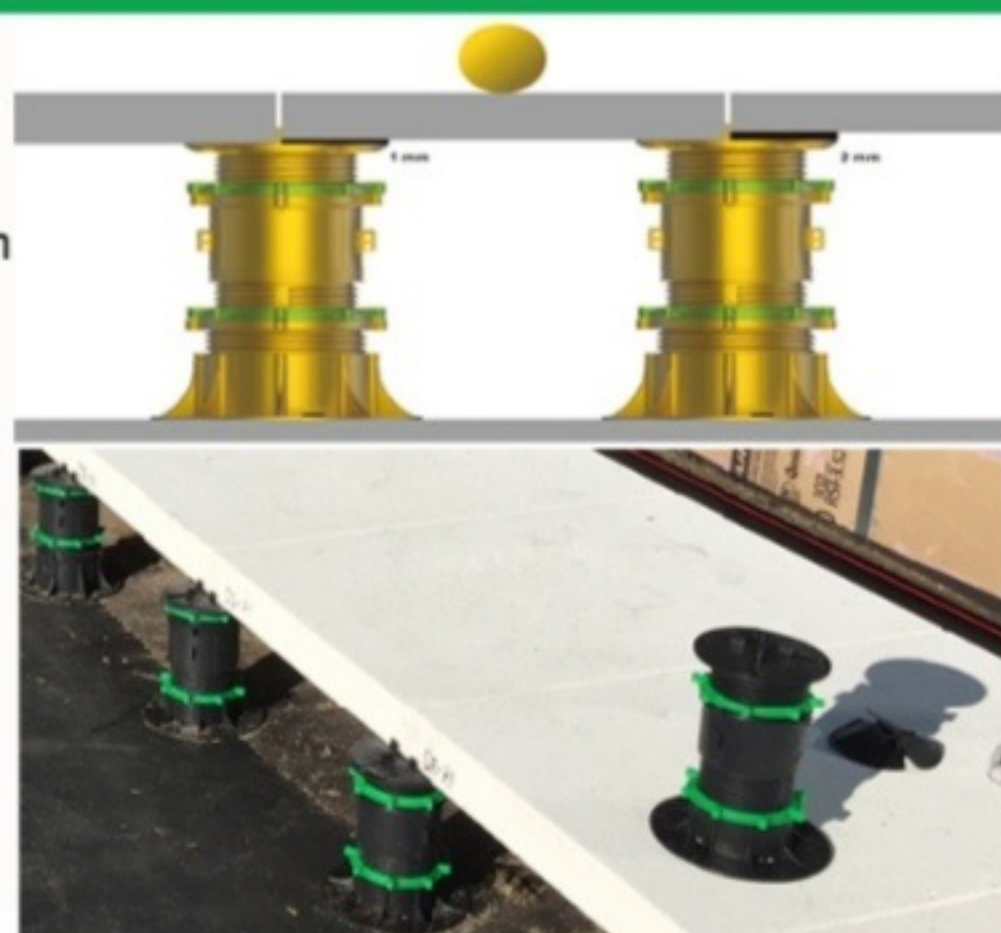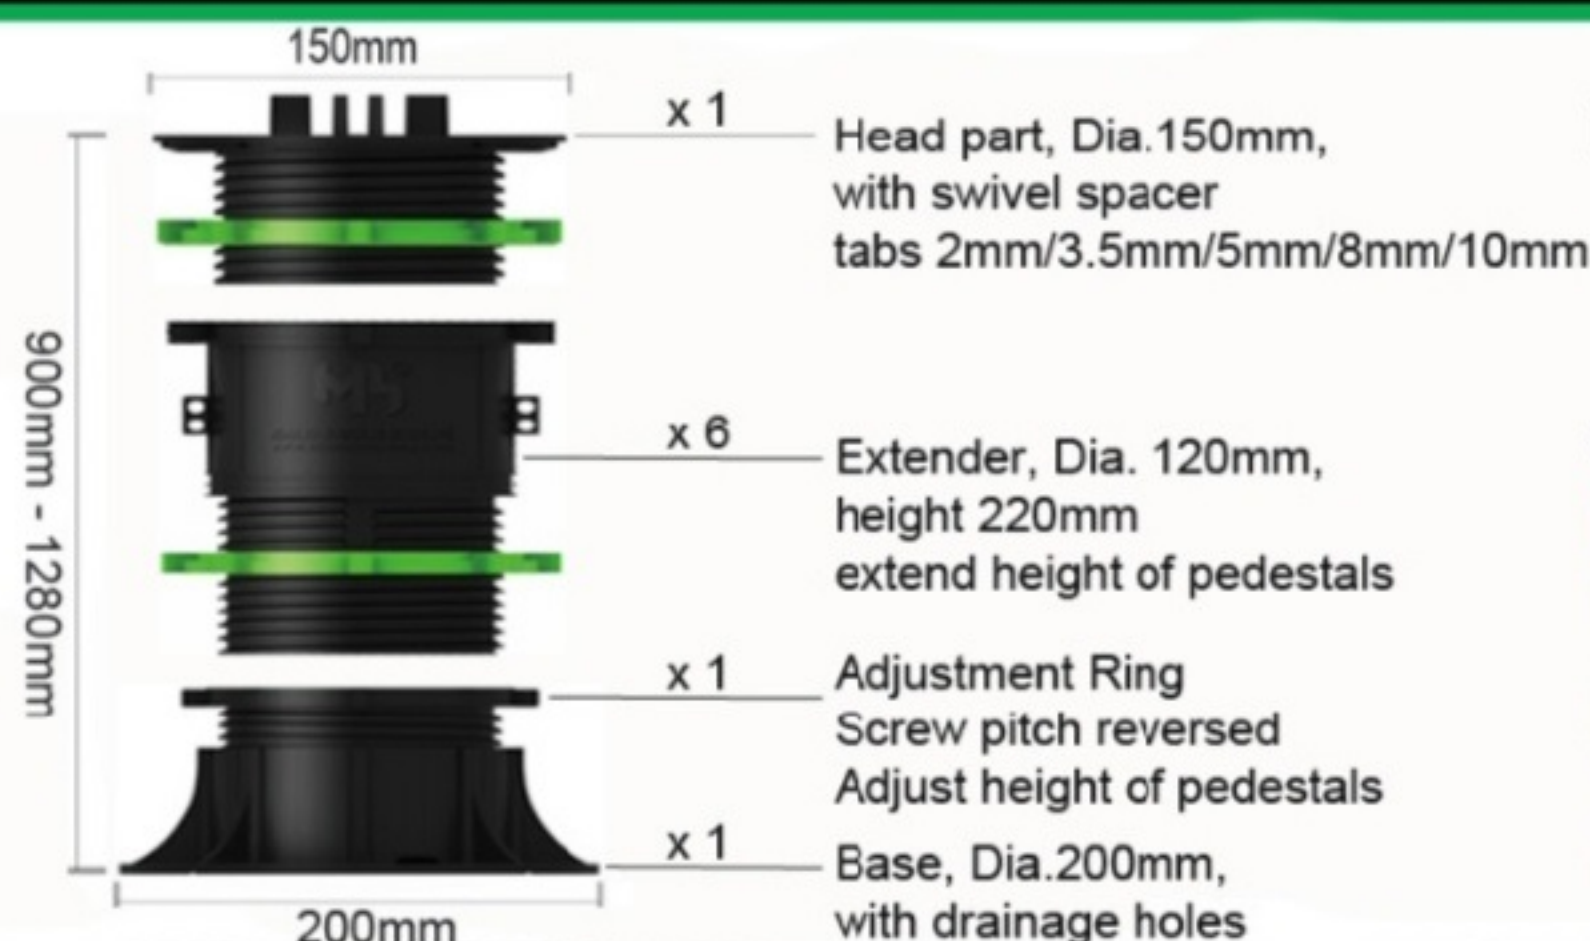

Adjustable Height

Adjustable height from 9000mm to 1280mm uninterrupted

Composition

1 head + 1 base + 1 adjustment ring + 6 HIGH extender + 7 fix collar
+ 1 spacer tab + 1 shim

Material

Polypropylene(PP), material thickness 4.5mm-6mm;
Composition 90% PP, 10% talc, UV and black masterbatch
100% recyclable

Dimentions

Head=diameter 150mm - surface area 176 cm²
Base=diameter 200mm - ground surface 315 cm²
Extender=extender height 220mm - adjustable height

Performance

Resisting UV rays, weather, sea salt and almost all chemicals.
Temperature range: -40 degree celsius to +120 degree celsius.

Application

Support for outdoor terraces with any kind of material: timber decking, stone, ceramic, composite material, metal, fiberglass grid... Can be placed on any stable substrate, also over insulation panels.

Slope corrector from 0%-5%

Slope correctors could compensate ground fall 0%-5%, making ideal levelling surface. It is assembled on the bottom of pedestals. Clients could choose to use it or not with different installing condition.

Application Details

1. Spacer tabs thickness: 2mm, 3.5mm, 5mm, 8mm, 10mm
2. Slope corrector : compensate slope 0%-5%
3. Shim: anti-slip, reduce impact, absorb shock and sound, compensate floor thickness difference



Fix Collar:

Fix and lock height after adjustment, increase stability



Standard green color, Made in PP

Shim:

anti-slip, reduce impact, absorb shock, compensate floor thickness difference



1mm / 2mm thickness

Compression Test



Performed on the full (1/1), half (1/2) or quarter (1/4) surface of the head

Position	Height(mm)	Breaking Loads(kgs)
1/1	1090	1260
1/2	1090	1120
1/4	1090	810

Safety Value for maximum allowable load by compression for HIGH MB-T6:

1. Safety for pedestrian terrace: divide the load indicated in the table by 2 with a safety factor of -15%.
2. Safety for technical floors: divide the load indicated in the table by 4 with a safety factor of -15%.

Adjustable paver pedestal

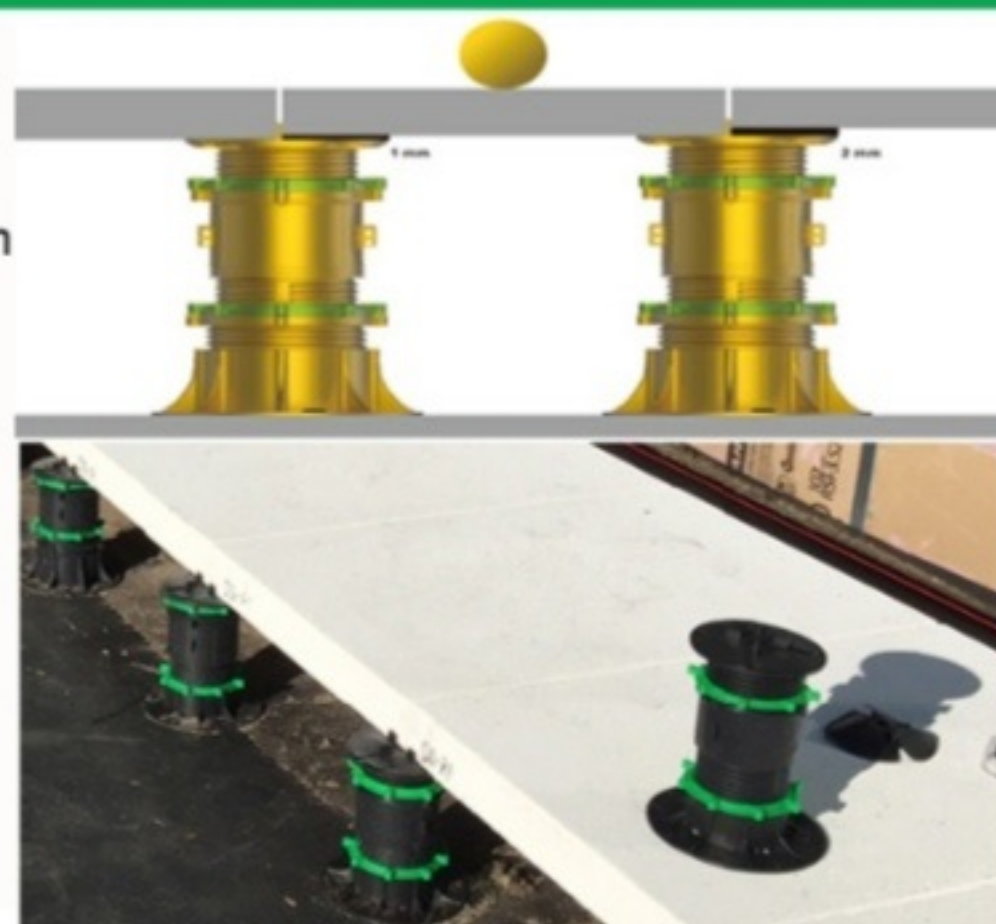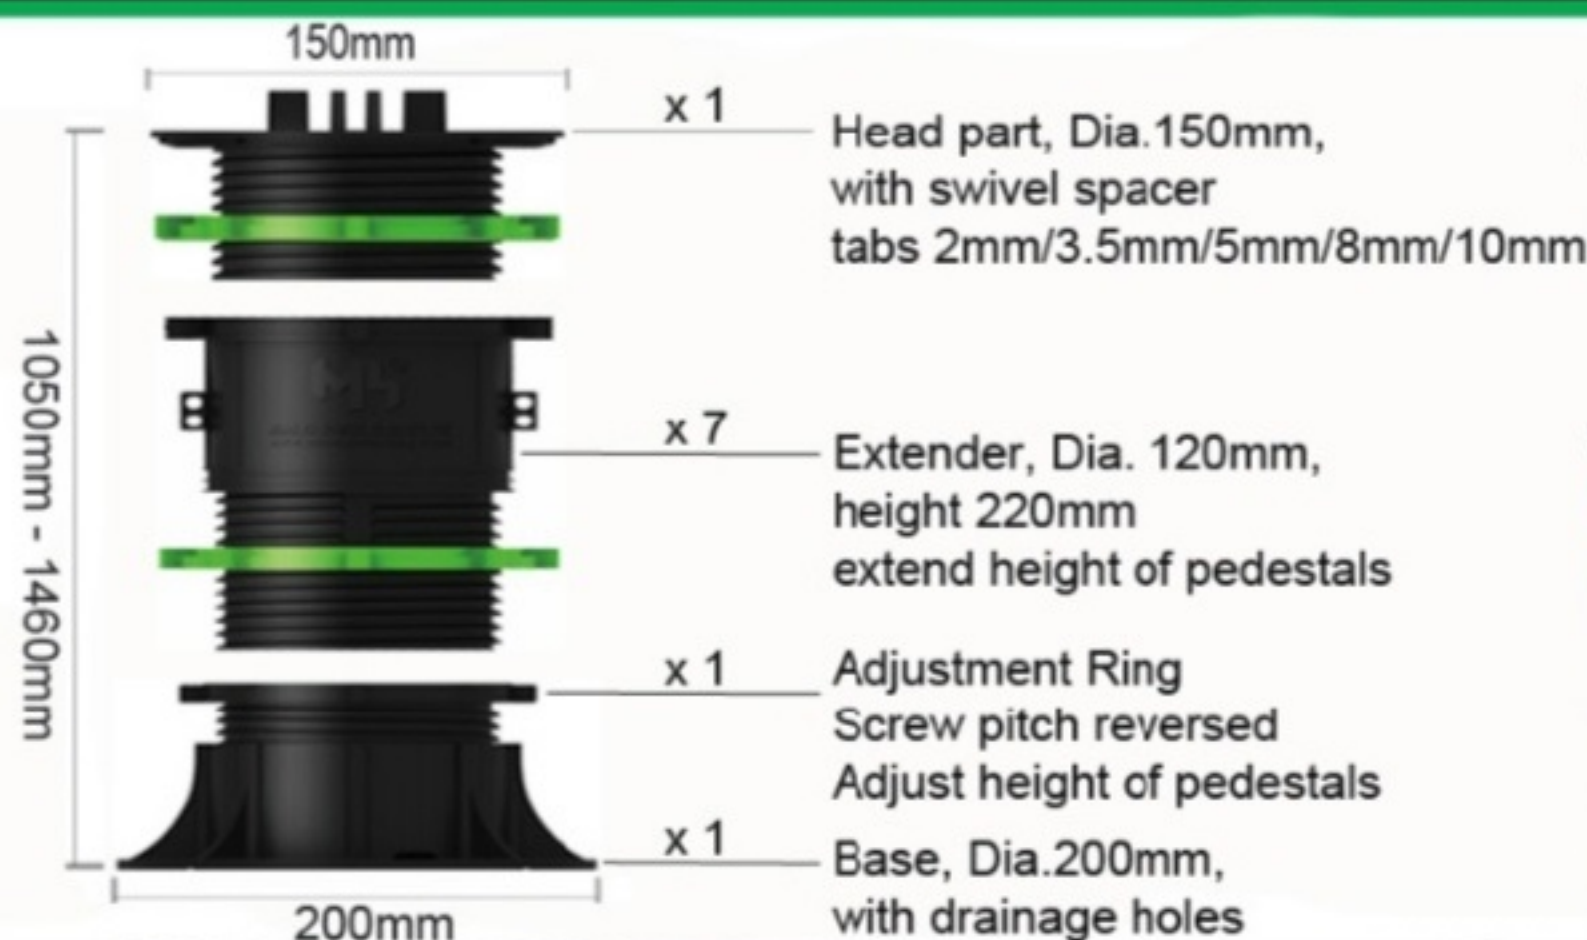

Adjustable Height

Adjustable height from 1050mm to 1460mm uninterrupted

Composition

1 head + 1 base + 1 adjustment ring + 7 HIGH extender + 8 fix collar
+ 1 spacer tab + 1 shim

Material

Polypropylene(PP), material thickness 4.5mm-6mm;
Composition 90% PP, 10% talc, UV and black masterbatch
100% recyclable

Dimensions

Head=diameter 150mm - surface area 176 cm²
Base=diameter 200mm - ground surface 315 cm²
Extender=extender height 220mm - adjustable height

Performance

Resisting UV rays, weather, sea salt and almost all chemicals.
Temperature range: -40 degree celsius to +120 degree celsius.

Application

Support for outdoor terraces with any kind of material: timber decking, stone, ceramic, composite material, metal, fiberglass grid... Can be placed on any stable substrate, also over insulation panels.

Slope corrector from 0%-5%

Slope correctors could compensate ground fall 0%-5%, making ideal levelling surface. It is assembled on the bottom of pedestals. Clients could choose to use it or not with different installing condition.

Application Details

1. Spacer tabs thickness: 2mm, 3.5mm, 5mm, 8mm, 10mm
2. Slope corrector : compensate slope 0%-5%
3. Shim: anti-slip, reduce impact, absorb shock and sound, compensate floor thickness difference



Fix Collar:

Fix and lock height after adjustment, increase stability



Standard green color, Made in PP

Shim:

anti-slip, reduce impact, absorb shock, compensate floor thickness difference



1mm / 2mm thickness

Compression Test

Performed on the full (1/1), half (1/2) or quarter (1/4) surface of the head

Position	Height(mm)	Breaking Loads(kgs)
1/1	1255	1050
1/2	1255	1180
1/4	1255	890

Safety Value for maximum allowable load by compression for HIGH MB-T7:

1. Safety for pedestrian terrace: divide the load indicated in the table by 2 with a safety factor of -15%.
2. Safety for technical floors: divide the load indicated in the table by 4 with a safety factor of -15%.