


FLX Stix ODV*LED for Outdoor installation*

Light Creatures in the Night



- Slim linear LED with color changing output and a dimmable system
- Various length available
- To be used with constant voltage DC 24 driver

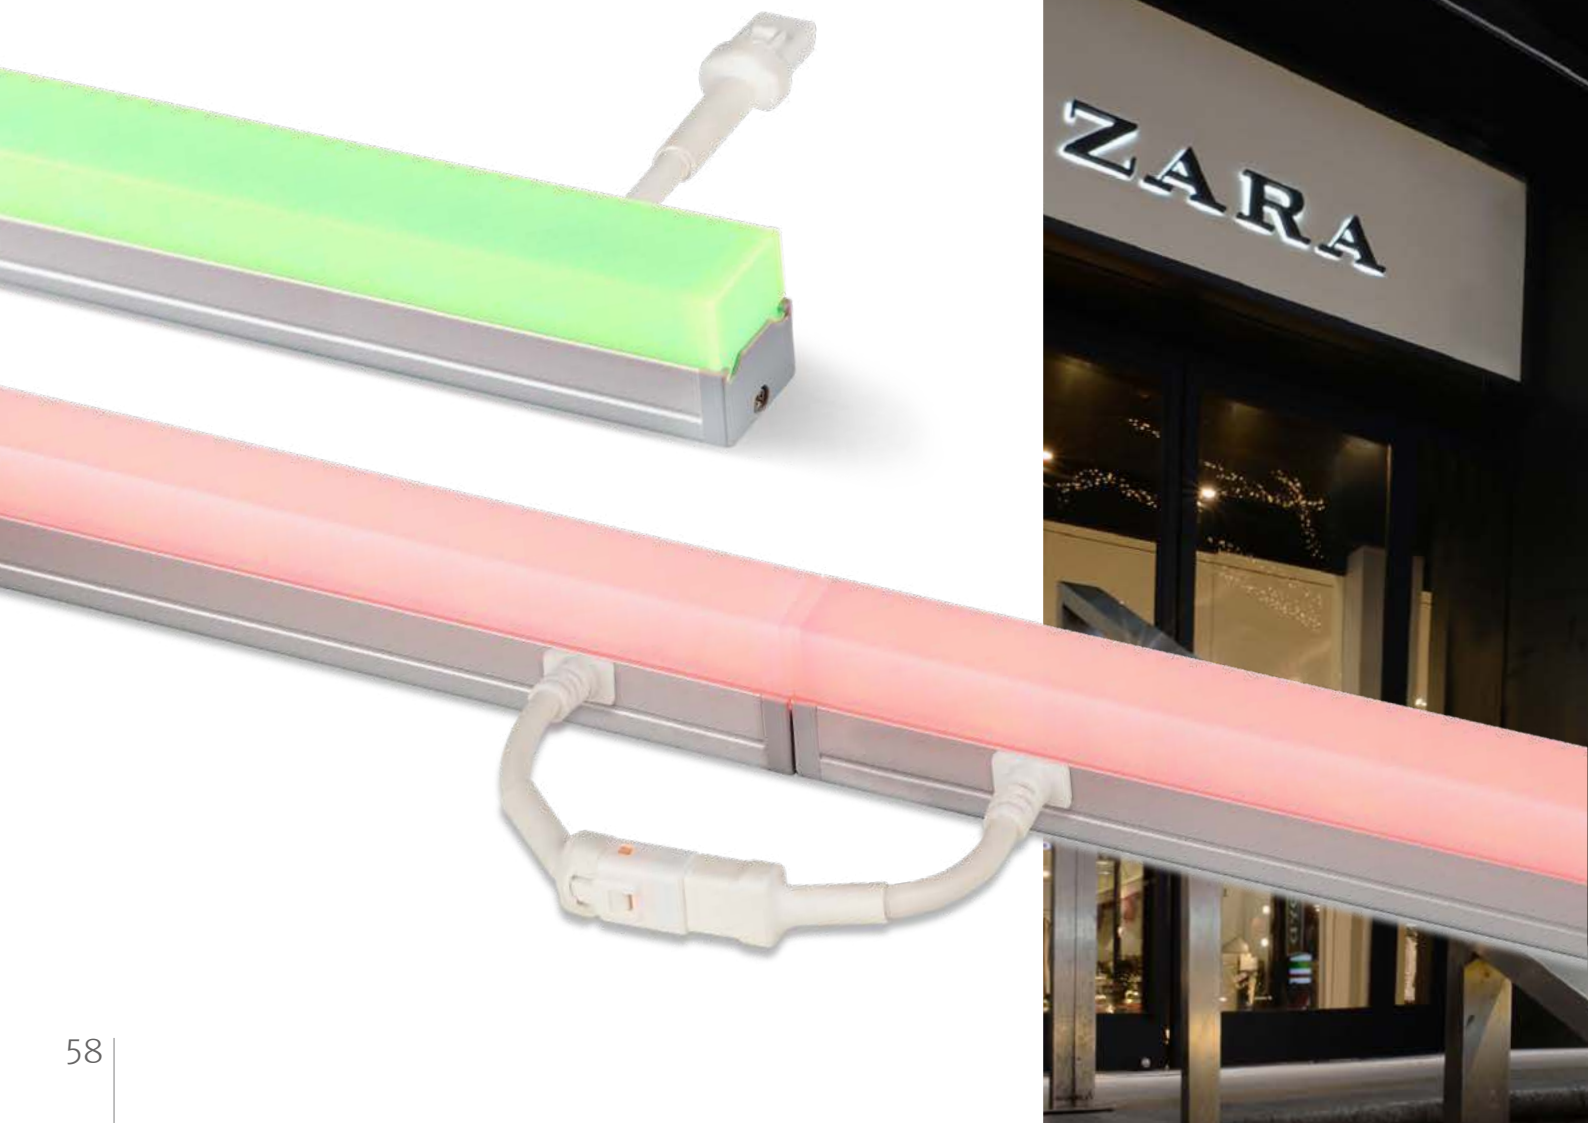




Specification

Model Name	Power Input	Lamp Power	Available Color	Operating Temperature	IP
ODV3 40K-24V	DC24V	3W	2,700K / 3,000K / 4,000K	0~45℃	IP66
ODV6 40K-24V	DC24V	6W	2,700K / 3,000K / 4,000K	0~45℃	IP66
ODV12 40K-24V	DC24V	12W	2,700K / 3,000K / 4,000K	0~45℃	IP66
ODV18 40K-24V	DC24V	18W	2,700K / 3,000K / 4,000K	0~45℃	IP66
ODV4 RGB-24V	DC24V	4W	R·G·B	0~45℃	IP66
ODV6 RGB-24V	DC24V	6W	R·G·B	0~45℃	IP66
ODV12 RGB-24V	DC24V	12W	R·G·B	0~45℃	IP66
ODV18 RGB-24V	DC24V	18W	R·G·B	0~45℃	IP66


Dimension

Model Name	Power Input (V)	Lamp Power (W)	A (mm)	B (mm)	C (mm)
ODV3 40K-24V	DC24	3	142.4	15	22.1
ODV6 40K-24V	DC24	6	282.5	15	22.1
ODV12 40K-24V	DC24	12	562	15	22.1
ODV18 40K-24V	DC24	18	841	15	22.1
ODV4 RGB-24V	DC24	4	190.5	15	22.1
ODV6 RGB-24V	DC24	6	282.5	15	22.1
ODV12 RGB-24V	DC24	12	562	15	22.1
ODV18 RGB-24V	DC24	18	841	15	22.1

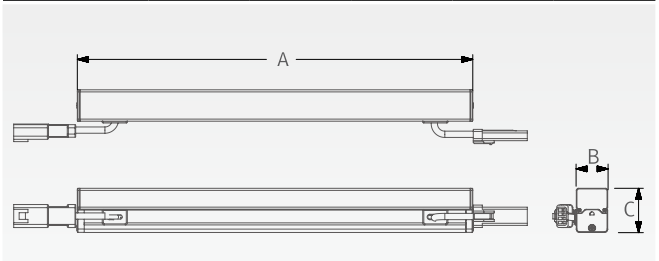

Model Name	A (mm)	B (mm)	C (mm)
FLC200-24V/T	228	68	39

Various options

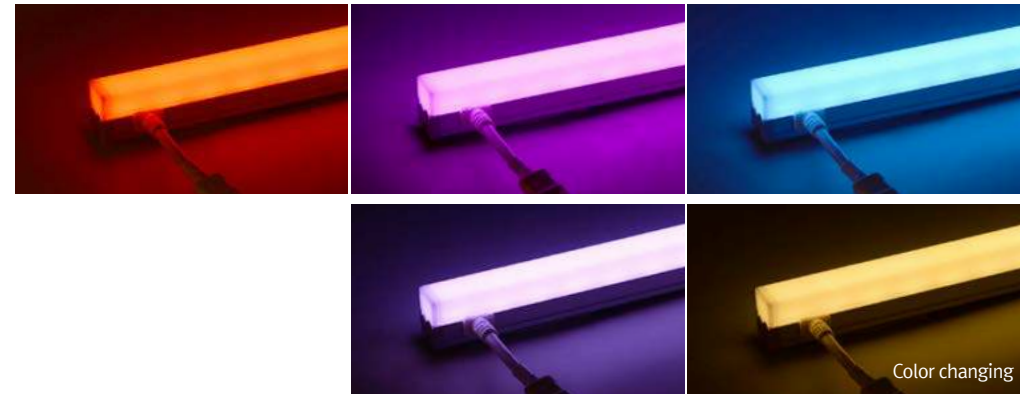

Accessories


Ⓐ Fixture : FLX Stix ODV (Single kelvin)

ODV3 40K-24V (3W)
ODV6 40K-24V (6W)
ODV12 40K-24V (12W)
ODV18 40K-24V (18W)




Ⓑ Fixture : FLX Stix ODV (RGB Color changing)

ODV4 RGB-24V (4W)
ODV6 RGB-24V (6W)
ODV12 RGB-24V (12W)
ODV18 RGB-24V (18W)

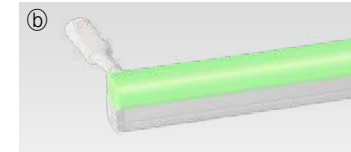


Ⓒ Connecting cable (Between FLX Stix ODV & FLX Stix ODV)

ODVPTC	ODVPTC1	ODVPTC2	ODVPTC4	ODVPTC6
150mm(6inch)	300mm(1feet)	600mm(2feet)	1,200mm(4feet)	1,800mm(6feet)

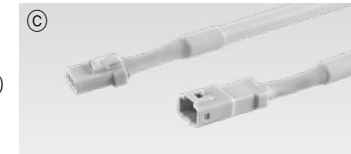

Ⓓ Power cable (Open power cable for FLX Stix ODV) : ODVPC

ODVPC(Non dimming) 2,500mm/4,000mm/6,000mm
ODVOPC(Dimming) 2,500mm/4,000mm/6,000mm

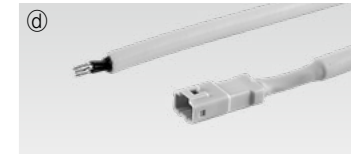

Ⓔ Mounting bracket : ODV-BRACKET

Included in fixture
ODV-BRACKET(A) : 1set = 2pcs
ODV-BRACKET(B) : 1set = 3pcs



Ⓕ LED Driver with 12way distributor, with power cord(1,800mm)

Part No	FLC15-24V/T	FLC30-24V/T	FLC75-24V-P/T
Capacity	15W 24V	30W 24V	75W 24V



Ⓖ LED Driver : FLC200-24V/T (200W, DC24V)

IP66



Ⓗ Dimming Interface (0-10/1-10, DMX512)

FDA-L2M0 : Max. 200W (100W/CH, 2CH)
FDA-L5M : Max. 200W (50W/CH, 5CH)



Ⓘ End cap : ODV-CAP

Included in fixture

