



# Product data sheet

ETC320-FS [EE] VA:IP67:LED-6/12W/3K  
185-7118  
WE-EF

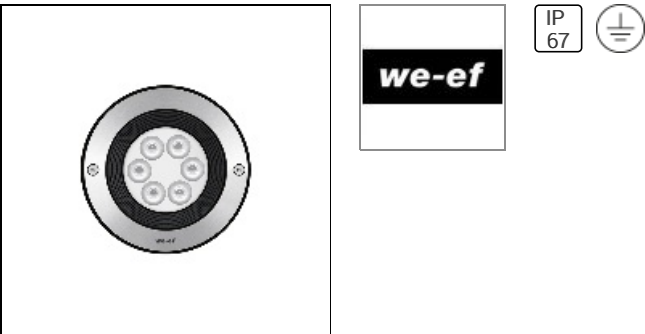

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Factory-sealed termination chamber complete with cable gland and 0.5 m of flexible PVC free cable. Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Luminaire installation blockout and sealable junction box included in supply.

## Light output 1



6 x LED			
Nominal lamp power	2 W	LOR	86%
Lamp flux	246 lm	ULOR	86%
Luminous efficacy	84 lm/W	Total flux	1267 lm
CCT	3000 K	Total power	15 W
CRI	80		

## Mounting mode

Floor recessed

## Shape and measurements

Height: 180 mm  
Diameter: 160 mm  
Weight: 4.6 kg

## Electric

System power: 15 W  
Appliance Class: I

## Protection

IP: 67